





## ANGLE FILTER HOUSING

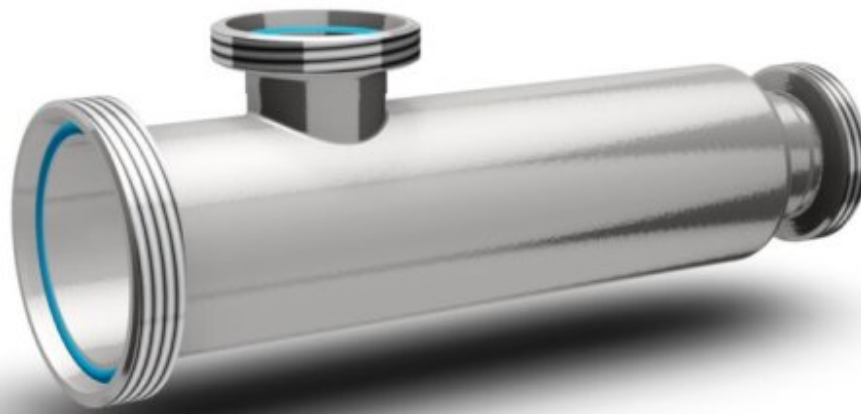

Angle filter designed for pipe installations to filter solid particles in a liquid medium. During the flow, the solid particles are deposited on the filter element. The filter element can be freely removed from the housing and cleaned of the deposited particles. Filters are used in the food, chemical and pharmaceutical industries. They are suitable for use with low viscosity fluids.

	DN	D	D1	L	A	B	Rd×S	kg
	7101 0	025	26	52	318	55	230 52×1/6"	1,900
	7101 0	032	32	70	332	65	235 58×1/6"	3,100
	7101 0	040	38	85	356	75	245 65×1/6"	4,200
	7101 0	050	50	85	356	75	250 78×1/6"	4,200
	7101 0	065	66	104	383	85	275 95×1/6"	6,200
	7101 0	080	81	129	542	100	345 110×1/4"	8,700
	7101 0	100	100	154	571	115	355 130×1/4"	12,700
	7101 0	125						
	7101 0	150						

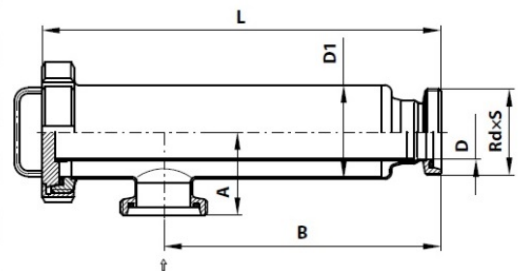

The standard filter insert is supplied with a 1 mm perforated sheet.





Variants of filter inserts:

- Perforated sheet insert 1-8 mm,
- Insert with a sieve with a mesh size of 0.05-0.8 mm,
- Slot insert with a slot width of 0.05-1 mm.

## GALERIE

